




GENERAL NOTES:

- EXISTING BASE INFORMATION DERIVED FROM PLANS PROVIDED BY HANLON ARCHITECTS IN SEPT. 2021.
- THE CONTRACTOR SHALL FIELD VERIFY ALL AREAS WITHIN SCOPE OF WORK PRIOR TO START OF LANDSCAPE CONSTRUCTION. CONTACT THE LANDSCAPE ARCHITECT, THE OWNER, OR OWNER'S REPRESENTATIVE IMMEDIATELY TO REVIEW AND APPROVE ANY FIELD ISSUES DURING CONSTRUCTION.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL MATERIAL AND CONSTRUCTION QUALITY ASSURANCES AND WARRANTIES.
- THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING THE LOCATION OF ALL EXISTING UNDERGROUND UTILITIES. ANY DAMAGE OCCURRING TO UTILITIES OR PROPERTY DURING EXCAVATION AND CONSTRUCTION WILL BE REPAIRED AT CONTRACTOR'S EXPENSE.
- THE CONTRACTOR WILL SUBMIT PRODUCT DATA AND SHOP DRAWINGS TO LANDSCAPE ARCHITECT FOR APPROVAL PRIOR TO INSTALLATION.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING DEMOLITION PERMITS FROM THE MUNICIPALITY AS NECESSARY. TO ALSO INCLUDE ANY NECESSARY PERMITTING FOR TRAFFIC REDIRECTION AND DISRUPTION.
- THE CONTRACTOR SHALL MAINTAIN SAFE, CLEARLY MARKED PEDESTRIAN AND VEHICULAR ACCESS TO ALL ADJACENT PROPERTIES THROUGHOUT THE CONSTRUCTION PROCESS.

PLANTING NOTES:

- THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL PLANT AND MATERIAL QUANTITIES PRIOR TO BIDDING AND PROCUREMENT.
- FIRST REPURPOSE ALL FILL FROM LANDSCAPE CONSTRUCTION FOR PLANTING OPERATIONS. ALL IMPORTED FILL FOR USE IN PLANTING BEDS WILL BE UNSCREENED TOPSOIL WITH COMPOST ADDED AT A RATE OF APPROX. 1.5 CU. FT. PER 1 CU. YD. OF TOPSOIL.
- LANDSCAPE ARCHITECT WILL APPROVE ALL PLANT MATERIALS PRIOR TO INSTALLATION.
- ALL WOODY PLANTS WILL BE OBTAINED FROM NURSERY SOURCE(S) WITH SIMILAR CLIMATE AND SOIL CONDITIONS AS THE PROJECT SITE.
- ALL MATERIALS WILL BE PLANTED AS PER DETAILS PROVIDED.
- BASE BID: ALL PLANT MATERIALS WILL BE PROVIDED WITH A 2-YEAR WARRANTY.
- BID ALTERNATE: ALL PLANT MATERIALS TO BE PROVIDED WITH A 3-YEAR WARRANTY.
- ALL PLANT MATERIALS WILL BE WATERED AT THE TIME OF INSTALLATION.
- PROVIDE 3" LAYER OF UNDYED, TRIPLE-GROUND HARDWOOD MULCH IN DARK BROWN COLOR TO ALL PLANTING BEDS, UNLESS OTHERWISE NOTED.
- ALL PLANTS PROVIDED SHALL BE STRAIGHT SPECIES OR NON-STERILE CULTIVARS, UNLESS OTHERWISE NOTED ON PLANT SCHEDULE.
- CONTRACTOR SHALL PROVIDE A NATURAL SPADED-EDGE BED LINE TO ALL PLANTING AREAS, UNLESS OTHERWISE NOTED.
- WATERING BAGS: ALL NEWLY PLANTED TREES SHALL BE PROVIDED EACH WITH A TREEDIAPER[®] MODEL #1036VA BY ZYNNOVATION LLC. OR APPROVED EQUAL. CONTRACTOR SHALL PRE-SOAK TREEDIAPERS TO FILL, UPON INSTALLATION. INSTALL TREEDIAPERS AS PER MANUFACTURER'S INSTRUCTIONS AND COVER WITH MULCH.**
- THE CONTRACTOR IS RESPONSIBLE FOR FULLY MAINTAINING ALL PLANT MATERIALS (INCLUDING BUT NOT LIMITED TO WATERING, SPRAYING, MULCHING, FERTILIZING ETC.) AND LAWN AREAS UNTIL THE WORK IS ACCEPTED IN TOTAL BY THE OWNER OR OWNER'S REPRESENTATIVE.

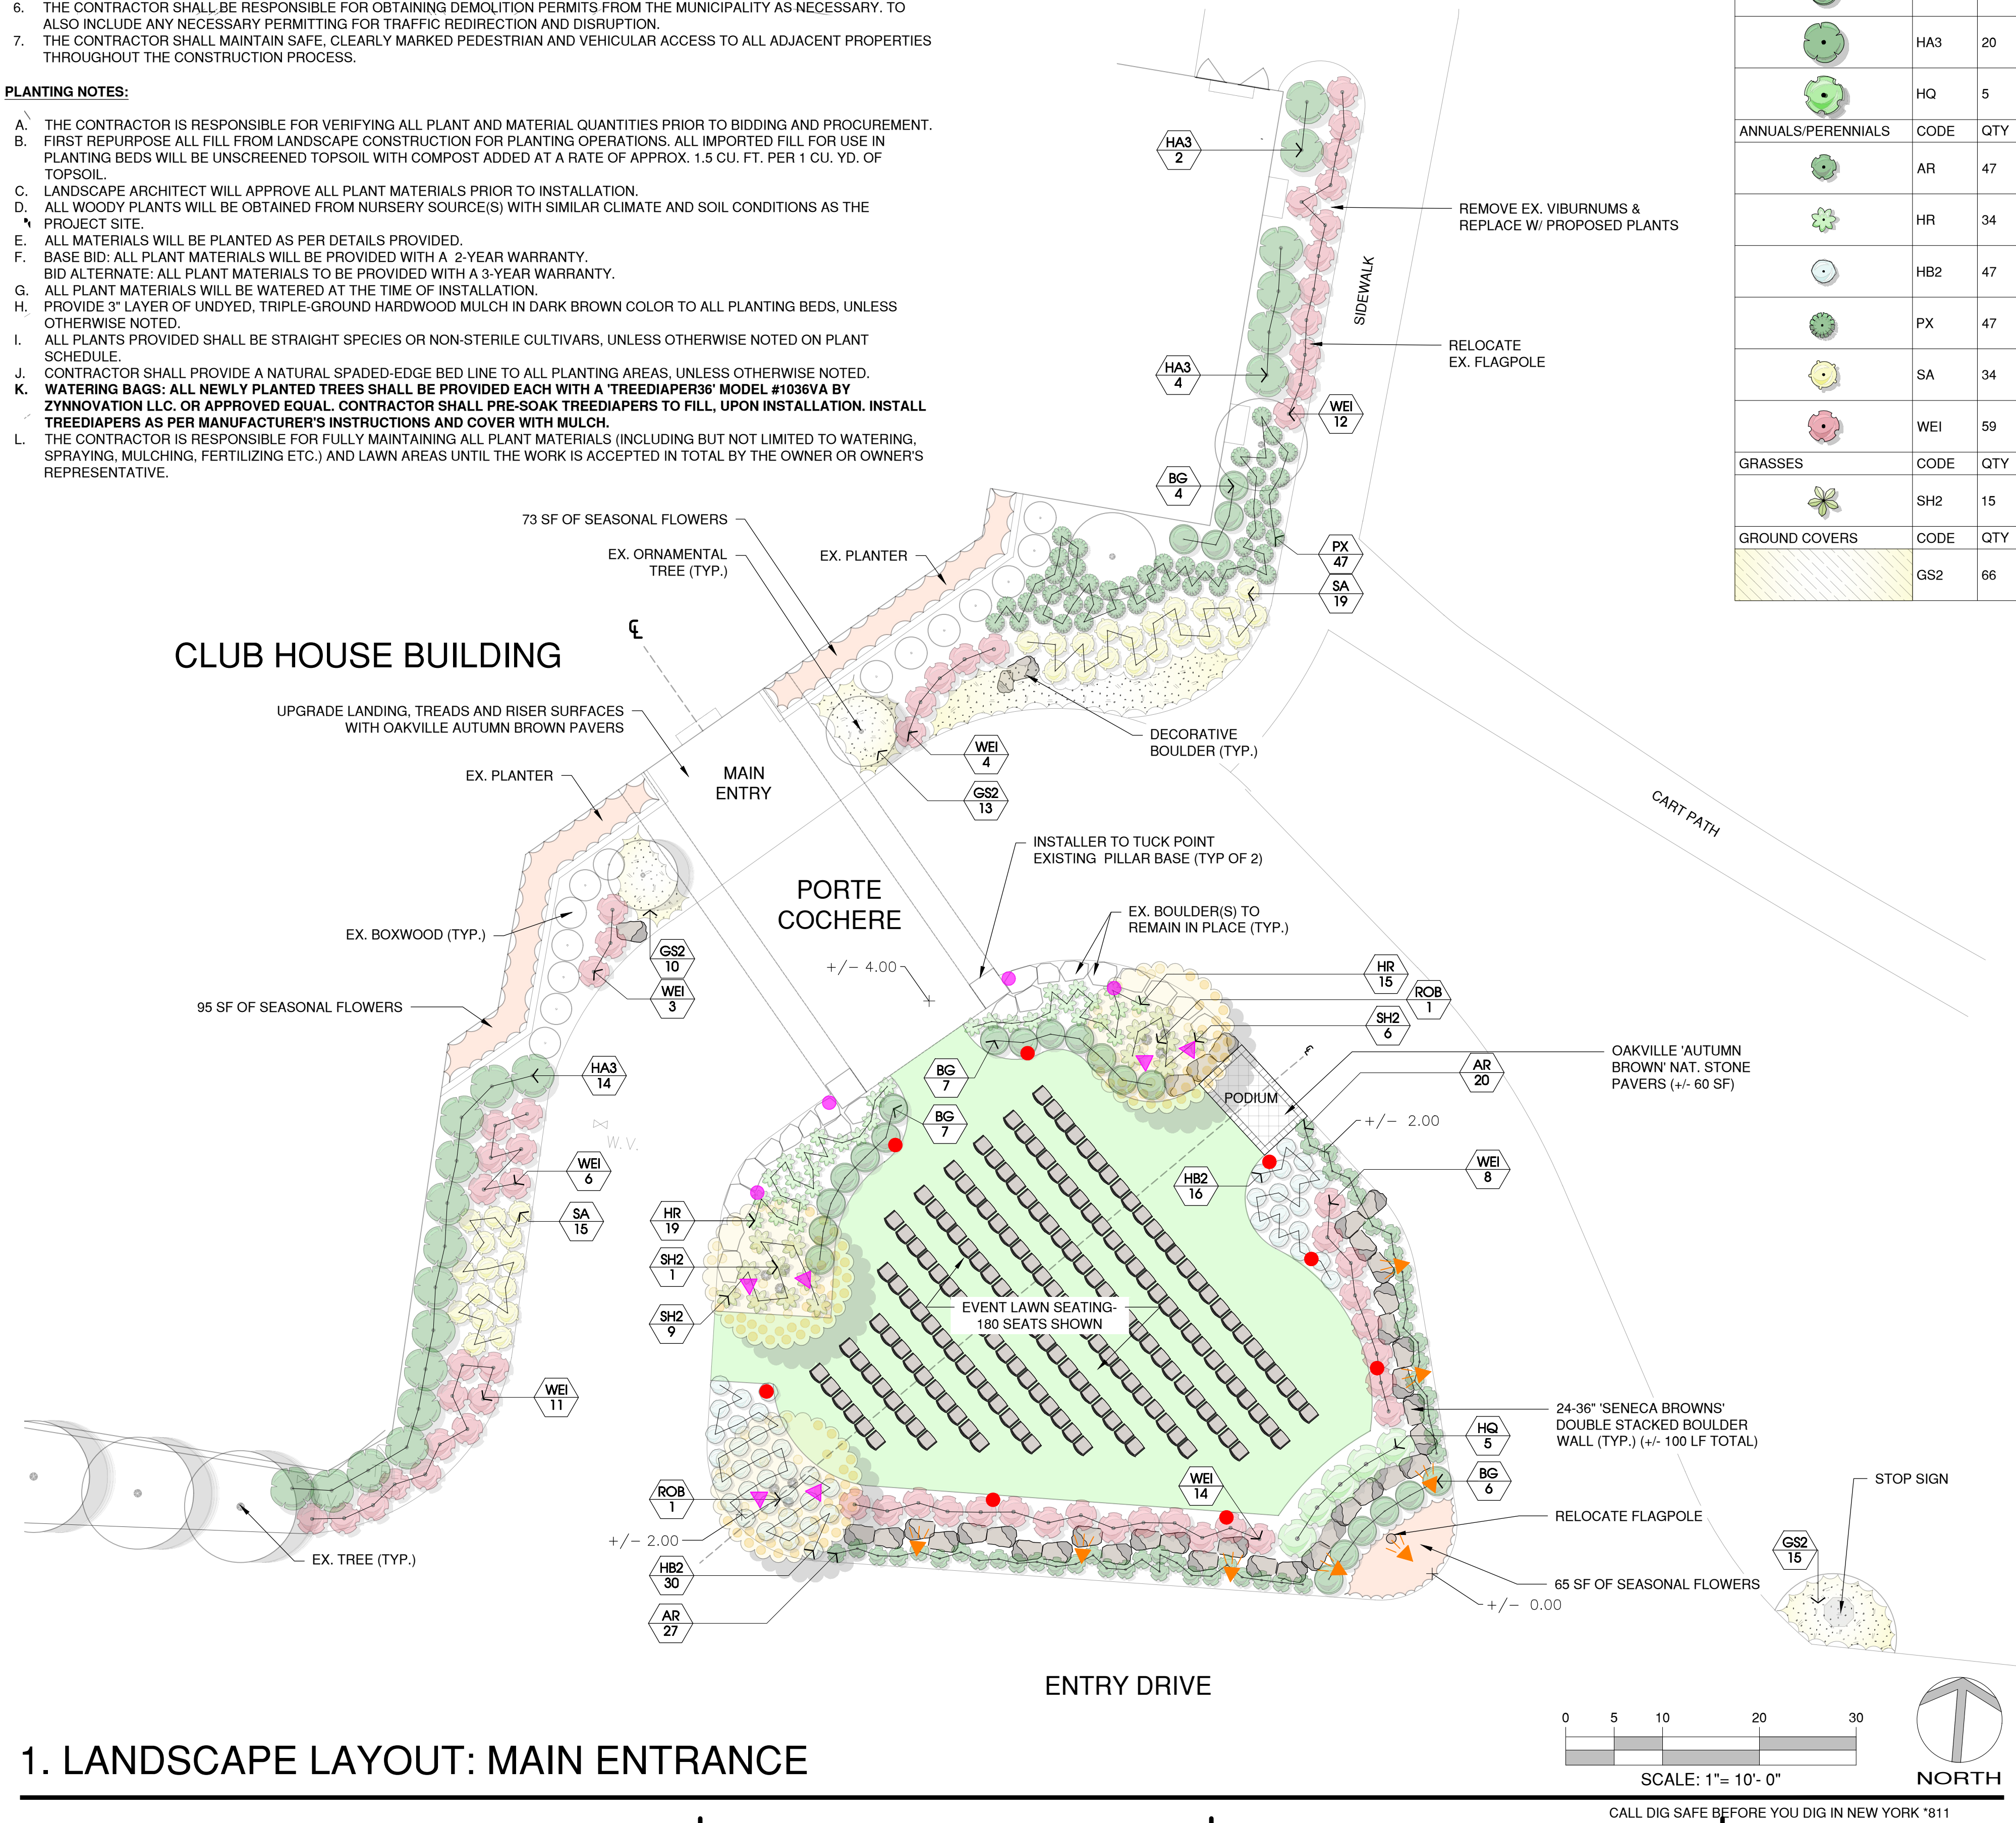


PLANT SCHEDULE MAIN ENTRANCE								
TREES	CODE	QTY	BOTANICAL NAME	COMMON NAME	CONT	CAL	SIZE	
	ROB	3	AMELANCHIER ARBOREA 'ROBIN HILL'	ROBIN HILL SERVICEBERRY	B&B	MULTI	8- 10' HT.	
SHRUBS	CODE	QTY	BOTANICAL NAME	COMMON NAME	CONT	SIZE		
	BG	24	BUXUS X 'GLENCOE'	CHICAGOLAND GREEN BOXWOOD	#3 CONT.	24- 30" SP.		
	HA3	20	HYDRANGEA ARBORESCENS 'ABETWO'	INCREDIBALL HYDRANGEA	#7 CONT.			
	HQ	5	HYDRANGEA QUERCIFOLIA 'RUBY SLIPPERS'	RUBY SLIPPERS HYDRANGEA	#3 CONT.			
ANNUALS/PERENNIALS	CODE	QTY	BOTANICAL NAME	COMMON NAME	CONT	SIZE		
	AR	47	ASTILBE X ARENDsii 'SNOWDRIFT'	SNOWDRIFT ASTILBE	#2 CONT.			
	HR	34	HEMEROCALLIS X 'RED VELVET'	RED DAYLILY	#2 CONT.			
	HB2	47	LAVANDULA ANGUSTIFOLIA 'HIDCOTE BLUE'	HIDCOTE BLUE LAVENDER	#1 CONT.			
	PX	47	POLYSTICHUM ACROSTICHOIDES	CHRISTMAS FERN	#2 CONT.			
	SA	34	SEDUM X 'AUTUMN JOY'	AUTUMN JOY SEDUM	#2 CONT.			
	WEI	59	WEIGELA FLORIDA 'BOKRASPIW'	SPILLED WINE® WEIGELA	#5 CONT.			
GRASSES	CODE	QTY	BOTANICAL NAME	COMMON NAME	CONT	SIZE		
	SH2	15	SPOROBOLUS HETEROLEPIS	PRAIRIE DROPSEED	#2 CONT.			
GROUND COVERS	CODE	QTY	BOTANICAL NAME	COMMON NAME	CONT			
	GS2	66	GERANIUM SANGUINEUM 'ALBUM'	WHITE BLOODY CRANESBILL	QUART			24" o.c.

LIGHTING SCHEDULE MAIN ENTRANCE		
SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY
	ALLIANCE OUTDOOR LIGHTING AL100 BRASS AREA LIGHT FIXTURE. MUST SPECIFY STEM/RISE HEIGHT. HAT DIMS 2.5" H X 6.75" D. ORDER CODE: AL100, BRASS, (AB) AGED BRASS, ROUND MOUNTING BASE LAMP: LBIPIN-200LM, 2.5W 3.75VA, 2700K, BEAMSPREAD: FLOOD	8
	ALLIANCE OUTDOOR LIGHTING BL200-BT BRASS BULLET UPLIGHT FIXTURE W/ INTEGRATED RGBW LED BOARD, PLASTIC GROUND STAKE INCLUDED. 8" H X 2.5" D. ORDER CODE: BL200-BT, BRASS, (AB) AGED BRASS, GUTTER MOUNT LAMP: BL200BT-LED, 6W 9VA, 2700K	8

-  EXISTING PATH LIGHT (4)
-  EXISTING UPLIGHT: REPURPOSE IN LOCATION SHOWN ON PLAN (6)

LIGHTING SCHEDULE NOTES:
MANUFACTURER: ALLIANCE OR EQUAL TO MATCH EXISTING LIGHT FIXTURES.
COLOR TEMP: ALL LUMINAIRES SHALL BE 2700K COLOR TEMPERATURE
FIXTURE FINISH: ALL FIXTURES SHALL HAVE AN AGED BRASS FINISH OR EQUAL TO MATCH EXISTING FIXTURE FINISH

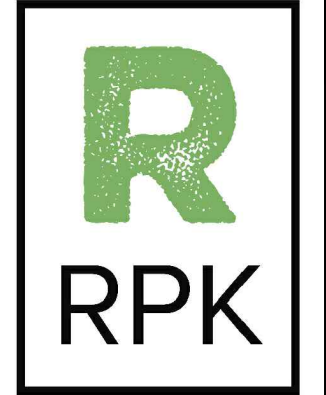

www.rpkla.com
(P) 585-502-7529
rkelly@rpkla.com



STAMP
NOT FOR CONSTRUCTION
WARNING:
IT IS A VIOLATION OF THE LAW FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF A LICENSED LANDSCAPE ARCHITECT, TO ALTER AN ITEM IN ANY WAY. IF AN ITEM BEARING THE SEAL OF A LANDSCAPE ARCHITECT IS ALTERED, THE LANDSCAPE ARCHITECT SHALL BE NOTIFIED BY THE ALTERING LANDSCAPE ARCHITECT. THE NOTATION "ALTERED BY:" FOLLOWED BY HIS SIGNATURE AND THE DATE OF SUCH ALTERATION, AND A SPECIFIC DESCRIPTION OF THE ALTERATION.

Δ	DATE	DESCRIPTION

PROJECT NAME
IRONDEQUOIT COUNTRY CLUB
4045 EAST AVENUE
PITTSFORD, NEW YORK

DRAWN BY: COB
CHECKED BY: RPK
ISSUE DATE: AUGUST 28, 2023
JOB NUMBER:
SHEET NAME: LANDSCAPE LAYOUT: MAIN ENTRANCE
SHEET NUMBER: L1.1